



**OIL & GAS DEVELOPMENT COMPANY LIMITED**  
**PROCUREMENT DEPARTMENT (LOCAL), ISLAMABAD**  
**SCHEDULE OF REQUIREMENT**

Material : **STEEL RACKS**

**Due Date:**

Tender Enquiry No: **PROC/LF/MMD-17152/17**

Bid Bond Value : RS. 120,000/-

EVALUATION WILL BE CARRIED OUT ON FULL

Attachment(if any) : YES

Sr No	Description	Quantity	Make/Brand offered	Unit	Unit Price (PKR) Inclusive Of All Taxes Except GST	Unit Price (PKR) Inclusive of GST	Total Price (PKR) Inclusive of GST	Delivery Period Offered	deviation from Tender Spec. If Any
1	STEEL RACK SIZE 10'X5'X3', 5 SHELVES INCLUDING TOP & BOTTOM,LOAD BEARING CAP RACK 2000KG,LOAD BEARING CAP EACH SHELVE 400KG,ADJUSTABLE ANGLE ASTM A36 FOR PILLAR 3"X3"X 10 SWG,SHELVE SHEET 14SWG.RUST PROTECTION APPICATION. DRAWING ATTACHED	100		Number					

**Special Note:-** The prospective bidders also download the master set of Tender Document


- The prospective bidders may keep in touch with OGDCL web site for downloading the clarifications/amendments (if any) issued by OGDCL.
- DELIVERY TERM: WITHIN 90 DAYS AFTER ISSUANCE OF LPO ON F.O.R NASHPA FIELD,DISTT. KARAK KPK. PAYMENT TERM: PAYMENT AFTER DELIVERY AT SITE.

Discount (if any) shall only be entertained on Schedule of Requirement of Bidding Document (Financial Proposal). If the discount is mentioned elsewhere in the bid, the same shall not be entertained.



## DRAWING OF ADJUSTABLE MATERIAL RACK

1

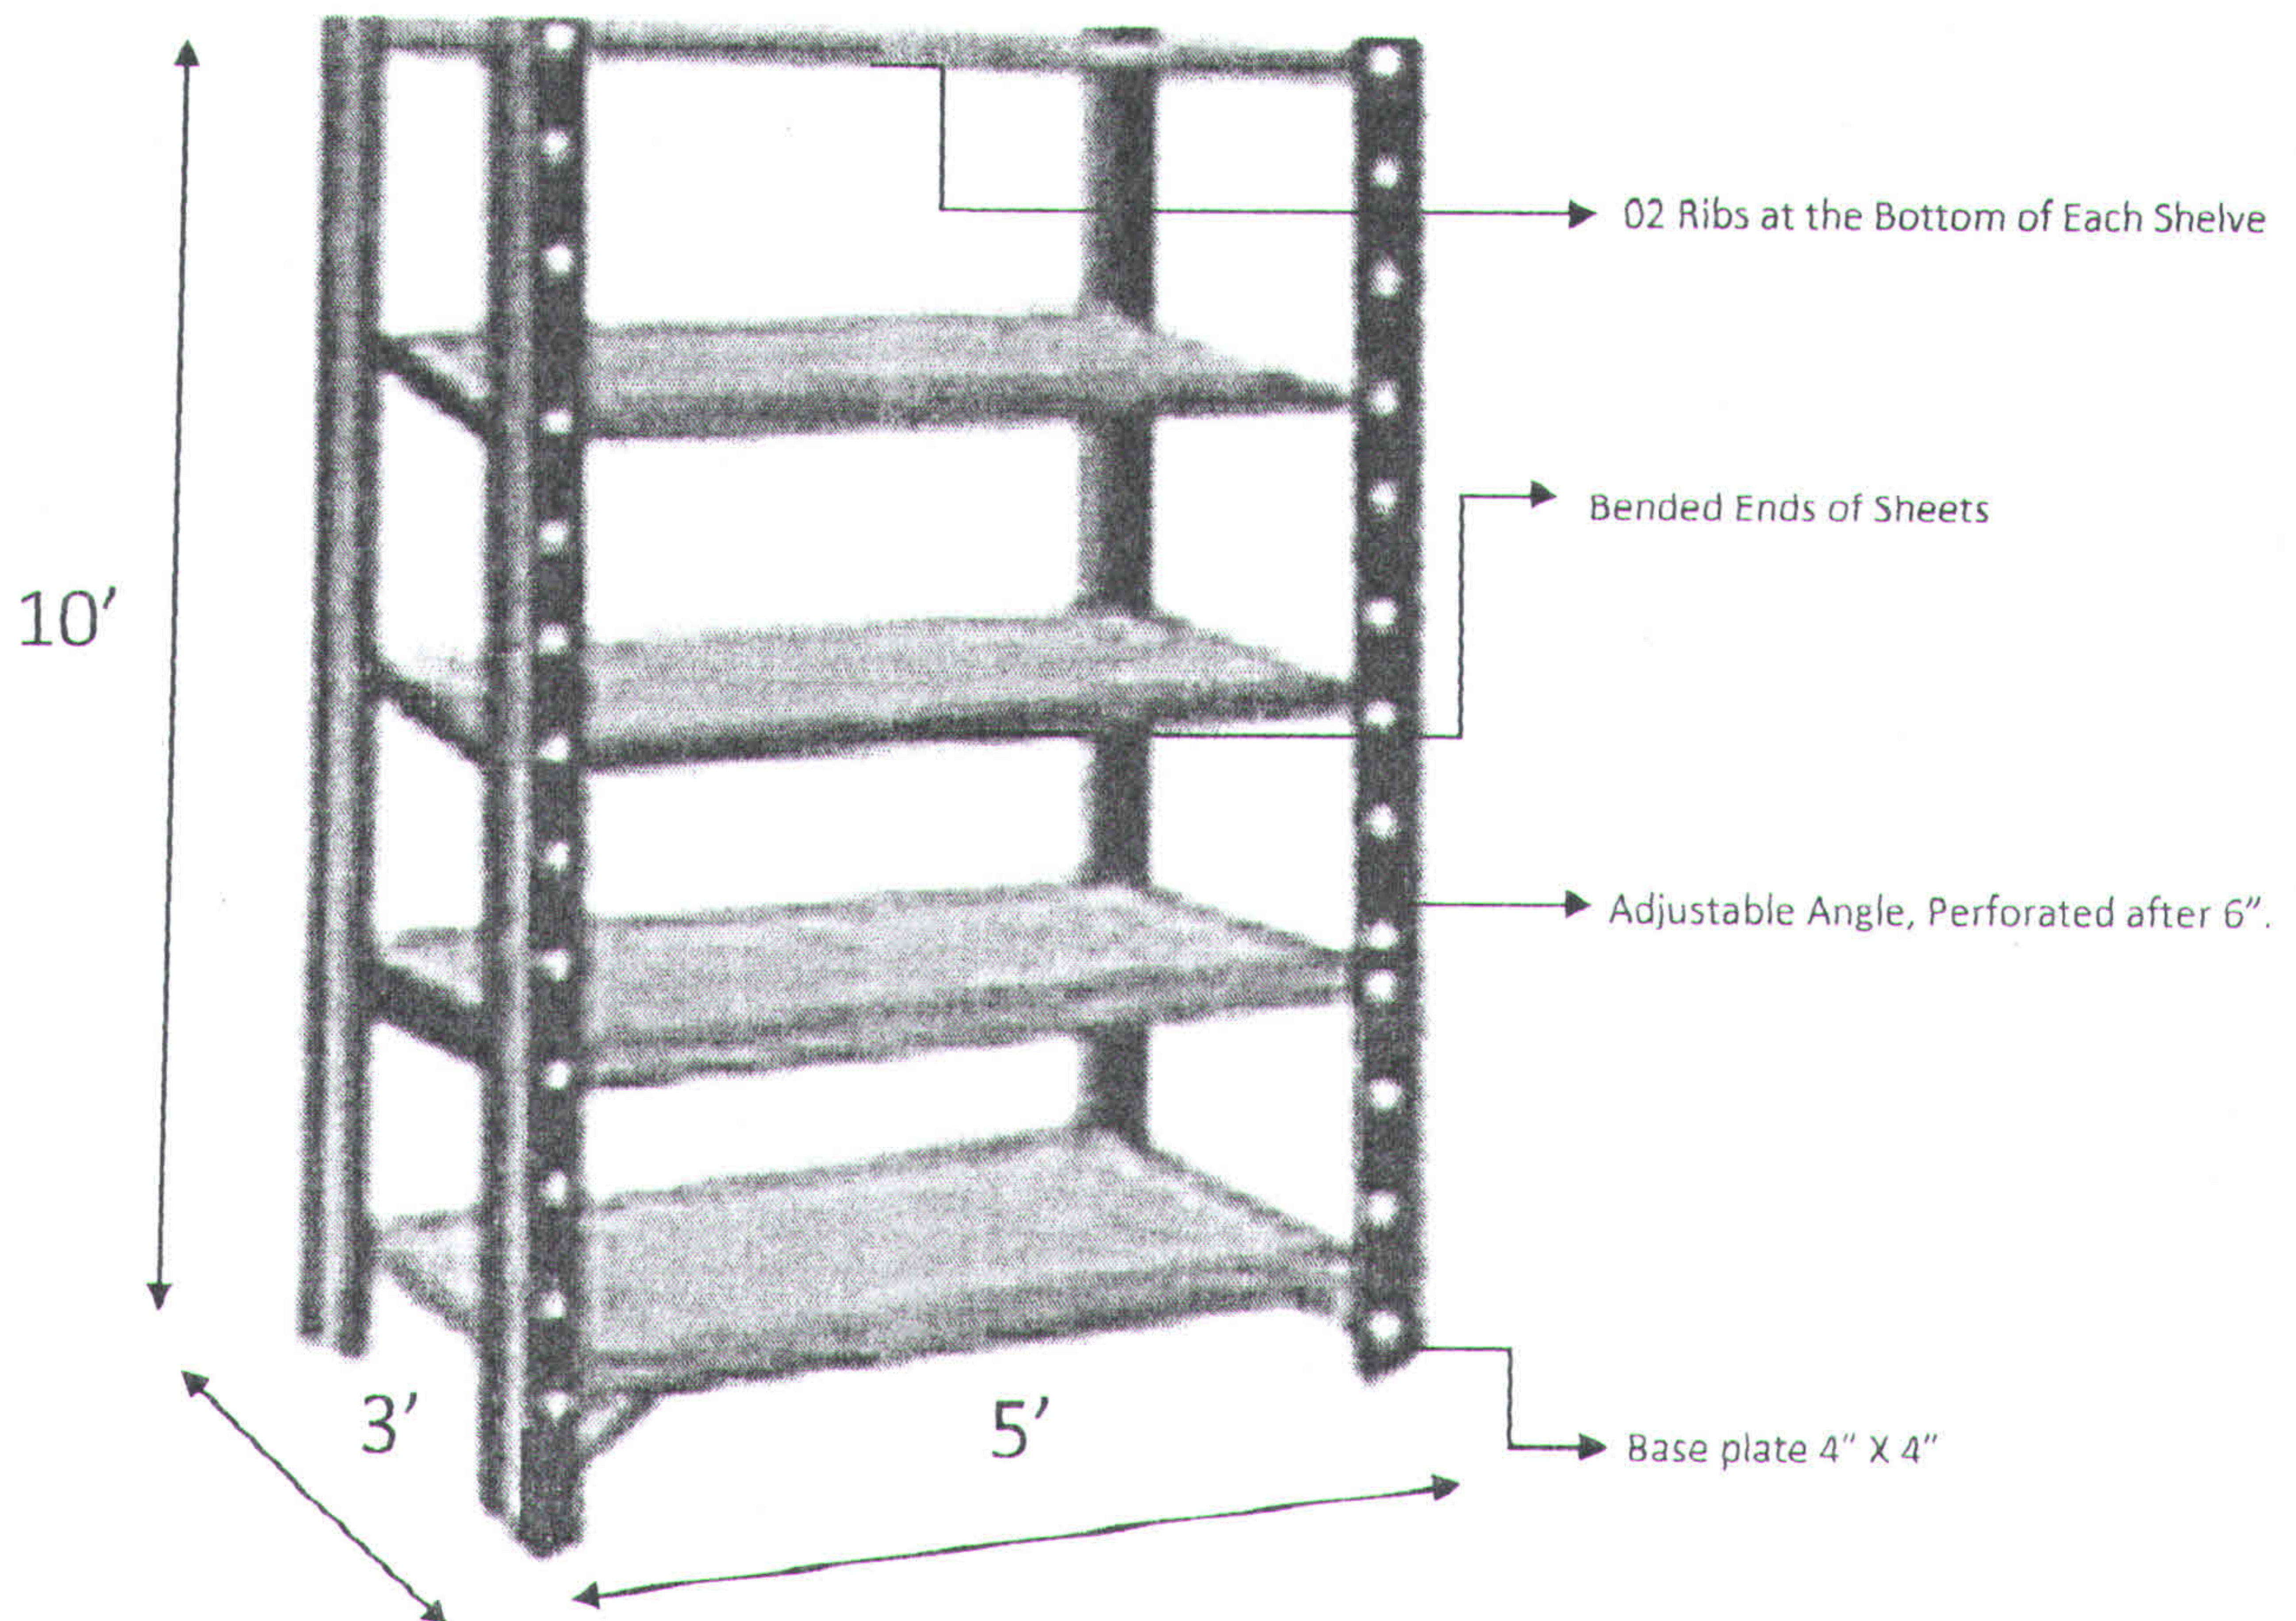

### Material Rack Size:

- Steel Rack size 10' X 5' X 3' (Height 10', Length 5', Width 3')
- 5 Shelves including Top and Bottom
- Load Bearing Capacity of Rack 2000 kg, load bearing of each Shelf 400 kg.
- Adjustable Angle for pillar ASTM A36, size 3" X 3" X 3.251 MM (10SWG) with base plate 4" X 4" X 3.251MM for each pillar. Angle for pillar should be perforated after 6" distance for adjustment of shelve.
- Supporting Sheet of shelve for steel rack should be 14 SWG and must be bended from all ends.
- 02 Ribs in bottom of each shelve, sheet for Ribs should be 3' X 6" X 1/6" (8 SWG),
- Galvanized bolts 08 Nos for each shelf fastening and proper support and grip.
- Adjustable, Rust protection Application (Removed Rust With Power Brush And Apply One Coat Of Rich Red Oxide And Two Coats Of Smoke Grey Enamel Paint)
- Delivery and Installation / Fixation of Racks at Neshpa Oil Field, district Karak, KPK.
- Delivery period 90 days after placement of order.