



OIL & GAS DEVELOPMENT COMPANY LIMITED
PROCUREMENT DEPARTMENT (LOCAL), ISLAMABAD
SCHEDULE OF REQUIREMENT

Material : **ELECTRICAL LIGHTING ITEMS**

Due Date:

Tender Enquiry No: **PROC-LD/PE&FD/17629**

Bid Bond Value : 400000

EVALUATION WILL BE CARRIED OUT ON GROUP WISE

Attachment(if any) : YES

Group A

Sr No	Description	Quantity	Make/Brand offered	Unit	Unit Price (PKR) Inclusive Of All Taxes Except GST	Unit Price (PKR) Inclusive of GST	Total Price (PKR) Inclusive of GST	Delivery Period Offered	deviation from Tender Spec. If Any
1	SODIUM FLOOD LIGHTS, 400 W (DATA SHEET ATTACHED AT ANNEX B), FLOOD LIGHT WITH IGNITOR, QUICK START, STEADY PERFORMANCE, ONE PIECE HOUSING AND LENS COLOUR, HEAVY DUTY, HIGH TEMPERATURE SILICONE RUBBER GASKET, IP 65/66 220-240 VAC 50HZ	70		Number					

Group B

Sr No	Description	Quantity	Make/Brand offered	Unit	Unit Price (PKR) Inclusive Of All Taxes Except GST	Unit Price (PKR) Inclusive of GST	Total Price (PKR) Inclusive of GST	Delivery Period Offered	deviation from Tender Spec. If Any
2	LIGHTING POLES, FOUR FEET LONG U CHANNEL DOUBLE ARM, HEIGHT: 8.0 MTR, (3 EQUAL SECTIONS WITH DIA OF 8", 6" & 4"), 5 TO 6 MM THICKNESS, PIPE MATERIAL CARBON STEEL ASTM A-106 WITH BASE PLATE, DETAIL ATTACHED AT ANNEXURE-C, HOT DIP GALVANIZED.	68		Number					

Group C

Sr No	Description	Quantity	Make/Brand offered	Unit	Unit Price (PKR) Inclusive Of All Taxes Except GST	Unit Price (PKR) Inclusive of GST	Total Price (PKR) Inclusive of GST	Delivery Period Offered	deviation from Tender Spec. If Any
3	4 CORE ARMoured 25 MM2 ELECTRIC POWER CABLE CU/PVC/SWA/PVC 600/1000 VOLT	500		Meter					
4	4 CORE ARMoured ELECTRIC POWER CABLE 16 MM2 CU/PVC/SWA/PVC 600/1000 V	2000		Meter					
5	SINGLE CORE ARMoured ELECTRIC POWER CABLE 10 MM2 CU/PVC/SWA/PVC 600/1000 V	2000		Number					

Special Note: The prospective bidders also download the master set of Tender Document

- The prospective bidders may keep in touch with OGDCL web site for downloading the clarifications/amendments (if any) issued by OGDCL.
- DELIVERY LOCATION: BASE STORE I-9, ISLAMABAD, DELIVERY TIME: 03 MONTHS AFTER ISSUANCE OF LPO, PAYMENT TERMS:



**OIL & GAS DEVELOPMENT COMPANY LIMITED
PROCUREMENT DEPARTMENT (LOCAL), ISLAMABAD
SCHEDULE OF REQUIREMENT**

100% AFTER DELIVERY.

Discount (if any) shall only be entertained on Schedule of Requirement of Bidding Document (Financial Proposal). If the discount is mentioned elsewhere in the bid, the same shall not be entertained.

Mandatory Checklist

Please confirm the compliance of the following mandatory information along with the bid(s) (failing which bids(s) will not be accepted)



OIL & GAS DEVELOPMENT COMPANY LIMITED
PROCUREMENT DEPARTMENT (LOCAL), ISLAMABAD
SCHEDULE OF REQUIREMENT

Documents	To be Attached with the Technical/Financial Bids	Compliance	
		Yes <input type="checkbox"/>	No <input type="checkbox"/>
Original Bid Bond	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Copy of NTN Certificate	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Copy of GST Certificate	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Confirmation that the Firm is appearing on FBR's Active Taxpayer List	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly signed and stamped Annexure-A (Un-priced)	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-B	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-D	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-L on Company's Letterhead	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly signed and stamped Annexure-M on Company's Letterhead	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly signed and stamped Annexure-N on Non-Judicial Stamp Paper duly attested by Notary Public	Technical Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-A (Priced)	Financial Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-C	Financial Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Duly filled, signed and stamped Annexure-E	Financial Bid	Yes <input type="checkbox"/>	No <input type="checkbox"/>



OIL & GAS DEVELOPMENT COMPANY LIMITED
PROCUREMENT DEPARTMENT (LOCAL), ISLAMABAD
SCHEDULE OF REQUIREMENT

For the Vendors/Contractors who opt to submit Bank Draft/Call Deposit/Pay order against Bid Bond/Performance Bond, our Accounts Department has finalized an arrangement for online payment to such Vendors/Contractors, which will be processed through (IBFT & LFT) for which following information is required:

i.	IBAN No. (International Bank Account Number 24 Digits)	
ii.	Vendor Name as per Title of their Bank Account	
iii.	Contact No.of Company's CEO/ Owner (Mobile & Landline)	
iv.	Bank Name.	
v.	Bank Branch Name and Code	

Name, Sign and Stamp of the authorized official of the Bidder(s) _____



DATA SHEET
WEATHER PROOF SAFETY FLOOD LIGHT

Annexure - B

General

1	Application	Weather Proof High Pressure Sodium Safety flood lights for large area lighting in Oil & Gas Fields.
2	Power Rating	400 Watts High Pressure Sodium Safety flood lights.
3	Ambient Temperature	upto (+) 55°C

Features

4	Light Source	High pressure Sodium Lamp
5	Light source life	Minimum 28000 hours
6	Light output	Minimum 48000 lumens
7	Ballast	Integral Choke ballast for quick start & steady performance.
8	Ignitor	Yes
9	Lens	Thermal shock & impact resistant. One piece lens cover
10	Mounting	Wall/Pole mounting; builtin slip filter
11	Rated Voltage	AC 220 V 50Hz/ (200V-240V)
12	Design	Compound Parabolic, double segment
13	Degree of protection	IP65/66

Standard Material


14	Body Material	Copperfree marine-grade aluminum alloy
15	Lens	Tempered glass
16	Reflector	Bright highly polished aluminum
17	Gasket	High Temperature Silicone rubber, firmly seated
18	Socket	Heavy duty porcelain with heavy gauge brass shell.
19	bolts	Stainless steel bolt

Compliance

20	Compliance	IP65/66
----	------------	---------


Accessories

21	Mounting brackets	Yes
22	Spares	Vendor recommended (Note:- Cost of Spares shall not be the part of financial evaluation.)


DCE (Tel.)

LIGHTING POLE

ANNEX-C

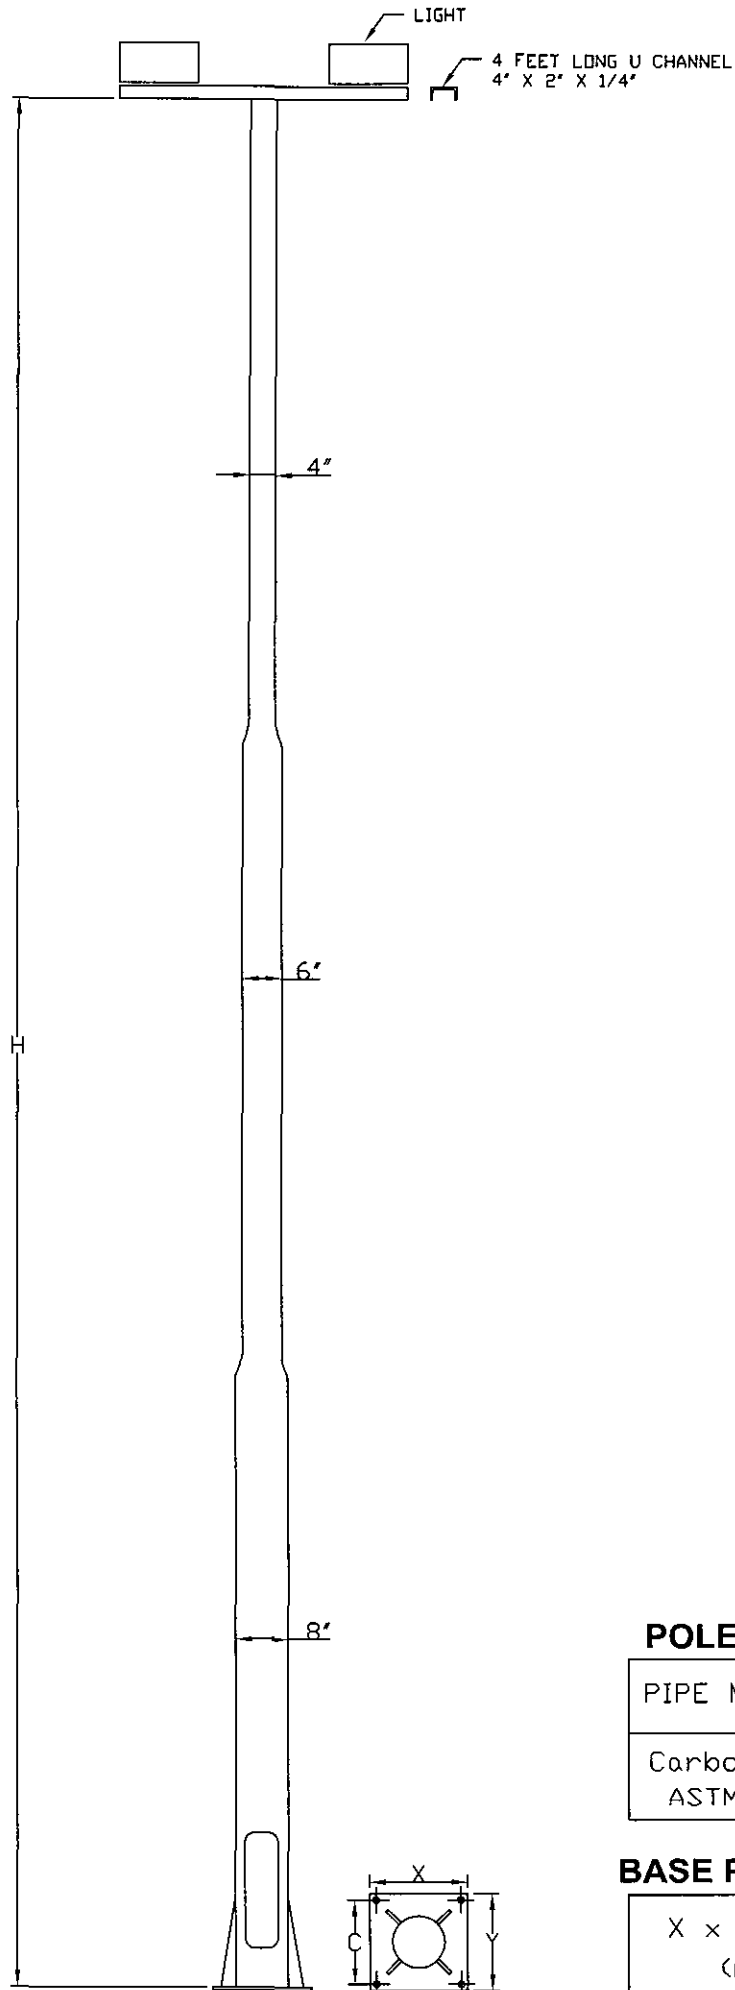

[Signature]
DCE (Tel.)

H (meters)
8.0 (03 equal sections)

POLE SPECIFICATIONS

PIPE MATERIAL	THICKNESS
Carbon Steel ASTM A-106	5-6 mm.

BASE PLATE DIMENSIONS

X x Y x T (mm)	C (mm)
460 x 460 x 16	360

NOTE:- 4 Holes of 1" dia. for insertion of 3/4" studs.