



OIL & GAS DEVELOPMENT COMPANY LIMITED

Request For Quotation (LOCAL)

OGDCL House ,
Jinnah Avenue,
Islamabad Pakistan

Header Note: PROCUREMENT OF CHARCOAL FILTERS
Tender Enquiry No: P R O C - L H / P T / P & P - 6300000148
Evaluation Criteria: Full Consignment Basis
Bidding Procedure: Single Stage Two Envelope
Vendor: OGDCL CB MODE LOCAL / FOREIGN(1006187)

Due Date:
Bid Bond Value: Rs. 250,750/-
Purchase Req: 30000199
Attachment (If Any): YES

SR#	Material No	Material Description	Unit	Quantity	Make Brand	Unit Price (PKR) Inclusive Of All Taxes Except GST/PST	Unit Price (PKR) Inclusive Of GST/PST	Total Price (PKR) Inclusive of GST/PST	Delivery Period (Days/Months)	Deviation from Tender Spec. if Any	Plant	
											Plant Code	Plant Name
1.	30-03789	ELEMENT FILTER, CHARCOAL, LEN GTH: 22" , PECO FILTER P# 00-012028 1122-C-12028 00-012028-003 RF1122-AC OR EQUIVALENT AS PER TOR	NO	400							0225	DAKHNI FIELD

Bid Validity Period: 180 DAYS FROM TECHNICAL BID OPENING DATE
Delivery Period: WITHIN 240 DAYS AFTER ISSUANCE OF PO.
Payment Terms: AFTER DELIVERY AND INSPECTION

Terms of Reference (TOR) for Charcoal Filters of Dakhni Plant:


OGDCL intends to procure the charcoal filters for their Amine and Dehydration units of Dakhni Plant. The details of the filter are as below:-

Charcoal Filters: PECO Filter P#00-012028 1122-C-12028/ Equivalent

- Canister OD: 11-1/8"
- Inner Diameter: 1-1/2 inches
- Canister Length: 22-1/8"
- Operating Temperature: 300 °F
- Max Pressure (Strength): 90 PSID
- Strength Lignite, Mesh: 8x30
- Surface Area: 650m²/g
- Pore Volume: 0.95ml/g
- Granular Activated Carbon 90~95 %
- Ash content: 05-10%
- Moisture: upto 02%
- Molasses Number: 350
- Iodine Number : 625, Abrasion : 75
- Core/Shell: Perforated Plate Steel/Tin Plated CS
- Core/ Outer Cover : Cotton
- End Cap Plated Steel
- Handle: Stainless Steel
- End Caps: Plated steel
- Gaskets: Polymer based
- Shelf Life: 03 Years Minimum
- Drawing is attached

1. Delivery period for material is 240 days from the date of issuance of Purchase order.
2. The bidder quoted filter manufacturer must have 05 years of manufacturing experience of charcoal filters. The bidder should also provide reference list from Oil & Gas /Petrochemical sector of Pakistan where similar type of quoted filters are in use/ supplied from same OEM.
3. Technical Specifications of quoted charcoal filter model including, activated carbon grain size, paper micron level, dimensions etc, should be the part of the technical bid.

4. Detailed Drawing showing dimensions & charcoal composition of quoted Filter should be provided with technical bid.
5. The bidder should strictly adhere to the specifications of charcoal Filters.
6. The variation in quantity at the time of order placement will not change the unit cost of material.
7. Standard Guarantee / Warrantee for charcoal filters to be confirmed by the bidder.
8. Bidder will be responsible for supply of charcoal filters up to Dakhni Plant, City Jand, District Attock.
9. Inspection of material will be carried out at Dakhni plant and after successful inspection, material will be accepted.
10. Parts must be new & free from any defect. Filter packing should be for long storage and distance traveling. Any damaged/ rejected Cartridge Filter found during inspection at Dakhni Site will have to be replaced by the supplier without any extra charges.
11. Payment will be made after shipment of complete consignment and inspection of supplied filters by End user at Dakhni Store.

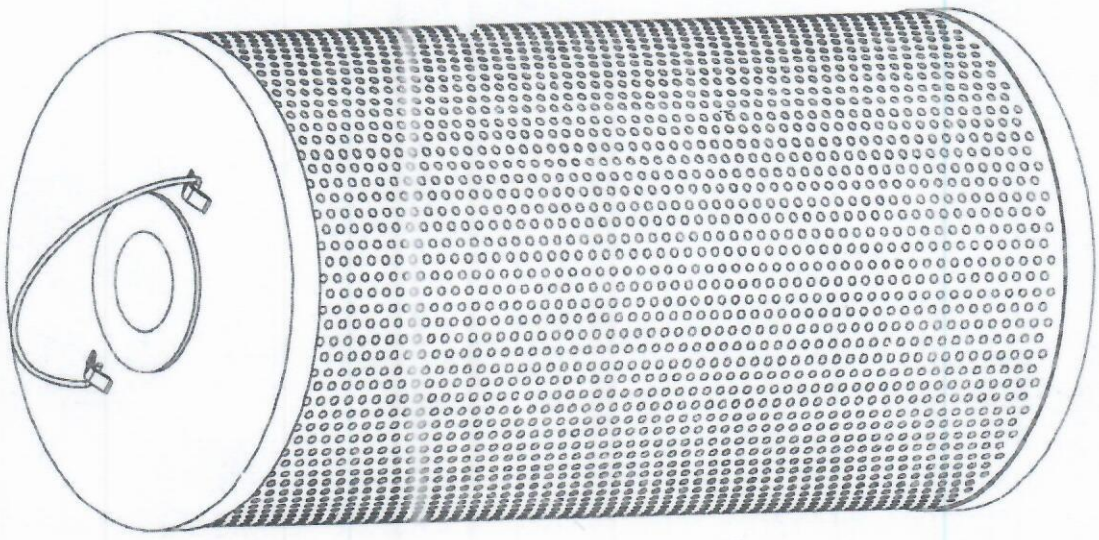

$\phi 2\frac{1}{4}$ I.D.

