

OIL & GAS DEVELOPMENT COMPANY LIMITED
PROCUREMENT DEPARTMENT, ISLAMABAD
FOREIGN SECTION A

(To be completed, filled in, signed and stamped by the principal)

ANNEXURE 'A'

Material VALVES ASSEMBLIES FOR MUD PUMP PZ-8/PZ-9
Tender Enquiry No PROC-FA/CB/DRM-4133/2018
Due Date
Evaluation Criteria FULL

SCHEDULE OF REQUIREMENT

Sr No	Description	Unit	Quantity	Unit Price (FOB)	Total Price (FOB)	Unit Price C & F BY SEA	Total Price C & F BY SEA	Deviated From Tender Spec. If Any
1	SEAT VALVE, IP# 202PZL039 (ASY SLUSH PUMP, "GARDNER-DENVER" MODEL 'PZJBF' / 'PZJ-AC-9'.	Number	50					
2	VALVE ASSY COMPLETE WITH SPRING & SEAT, IP# 202PZL482A (FOR DETAILSEE ATTACHMENT) (ASY SLUSH PUMP, "GARDNER-DENVER" MODEL 'PZJBF' / 'PZJ-AC-9'.	Number	100					
3	VALVE ASSY WITHOUT SPRING & SEAT (FOR DETAILSEE ATTACHMENT) (ASY SLUSH PUMP, "GARDNER-DENVER" MODEL 'PZJBF' / 'PZJ-AC-9'.	Number	100					

*Technically
 VETTED (Signature)*

Note:

- 1. Bid bond:** Pursuant to tender clause # 2.2, 11.4, 13 & 35.3.2, bid(s) must be accompanied by an upfront bid bond in the form of pay order/ demand draft or bank guarantee issued by scheduled bank of Pakistan or a branch of foreign bank operating in Pakistan, for an amount of **US\$ 400/- (US\$ Four hundred only)** or equivalent Pak Rupees, with technical bid and valid for 150 days from the date of opening of the bids. The bank guarantee must be issued in accordance with the format as per Annexure-C of the tender documents.
- 2. Shipment from ACU member Countries:** In case of shipment from ACU member countries, the LC beneficiary should be of that particular country from where the consignment is being shipped.
- 3. Terms and conditions:** Bidders are advised to carefully read all the terms and conditions of the Tender Document available at OGDCL web site in the master tender document.
- 4. Summary rejection criteria:** - The summary rejection criteria at clause 35 of the tender document may also be examined carefully. Any bid not meeting the criteria spelled in the clause # 35 shall be summarily rejected without any right of appeal. The detailed tender document is available on OGDCL website as "Master set of tender document-Foreign".
- 5. Payment Terms:** Clause No: 4 of Section-III (Part-B) i.e. Conditions of Contract "Special" of Tender Document has been amended and following will be the payments methods.
 - i. **Tender value less than or equal to US\$ 200,000:** Payment to the Contractor/ bidder in foreign currency shall be made by establishing in favor of the Contractor an irrevocable Letter of Credit (hereinafter called the L/C). 70 % Payment (s) under the L/C will be made for the FOB/ CFR / CPT (as the case may be) price of material of each shipment upon submission of the shipping documents. Balance 30% Payment will be released after receipt inspection and acceptance of material.
 - ii. **Tender value more than US\$ 200,000:** Payment to the Contractor/ bidder in foreign currency shall be made by establishing in favor of the Contractor an irrevocable Letter of Credit (hereinafter called the L/C). 80 % Payment (s) under the L/C will be made for the FOB/ CFR / CPT (as the case may be) price of material of each shipment upon submission of the shipping documents. Balance 20% Payment will be released after receipt inspection (in addition of pre-shipment inspection) and acceptance of material.

Terms & Conditions for Indent No. M(RMP)2018/32 for Procurement of Valve Assemblies for Mud Pumps , Model PZ-8/9 (M/s GD, USA)

1. The OGDCL demanded consumables are required for mud pumps model PZ-8 & PZ-9 (M/s Gardner Denver, USA). Part numbers mentioned in OGDCL SoR are taken from OEM Part Manual, relevant page of OEM Part Manual reflecting part numbers of OGDCL SoR demanded items is attached as **Drawing-327PZL810**.
 - 1.1 Item No.02 of OGDCL SoR (Complete Valve Assembly with Spring & Seat, Part No.202PZL482A) consisting of Spring (78H44), Locknut (50V27), Washer (201PZL279), Insert (201PZL106), Valve (201PZL482) & Seat (201PZL039).
 - 1.2 Item No.04 of OGDCL SoR (Valve Assembly without Spring & Seat, Part No. Not Known) consisting of Locknut (50V27), Washer (201PZL279), Insert (201PZL106) and Valve (201PZL482).
 - 1.3 Valves assemblies shall be made of material that can with stand 5000 PSI pressure and suitable for use with temperature range (-10 to 100 degree Celsius).
2. Bidder to notify in advance if any of the OGDCL demanded part(s) is/are not appropriate, superseded, discontinued and suggest for correct part(s). Bidder to clearly mention part number of each and every item in his quote.
3. Bidder, if not OEM of required part, shall confirm that their offered parts is exact replacement(100% equivalent) to OEM Parts/ OGDCL demanded item and in case of any misfit of any/all items in mentioned mud pumps, bidder will have to replace immediately (all/any) items without any cost to OGDCL.
4. Bidder to provide along with the proposal/bid, a certificate from manufacturer confirming that all the offered items will be supplied new , not re-manufactured, unused, free from all manufacturing defects and manufactured not earlier than 2018. Date of manufacturing along with manufacture part number shall be mentioned on packing or engraved on each item.
5. Bidder to provide along with the proposal/bid, adequate and relevant OEM/ manufacturer technical literature confirming offered technical specification (material type, material grade, working temperature, working pressure, etc.) for offered items.
6. If the bidder is not manufacturer of offered part(s), a hard copy of authority letter on letterhead of the manufacturer / authorized distributor of manufacturer, in original, must be provided with the bid stating that the manufacturer / authorized distributor of manufacturer has authorized the bidder to offer the parts against this OGDCL tender enquiry. Scanned authority letter or its photocopy will not be accepted.
7. The offered items shall be made by manufacturer having mud pump parts manufacturing experience for last fifteen (15) years. In this regard, bidder to provide manufacture' company profile and sale record for last five (05) years for same type consumables / mud pumps parts by mentioning client name, address, email and phone/fax contacts. All the claims by bidders on behalf of manufacturer shall reflect on manufacturer' official website in English.
8. Bidder to provide along with the proposal/bid, standard ^{Manufacturer} OEM warranty for the offered items.
9. Bidder to mention in financial bid description, quantity, unit price (FOB), unit price (CPT Karachi) & extended price, quoting price simply for lot is not acceptable. OGDCL may increase or decrease quantity as per its own requirement at time of placing order.
10. Bidder to submit all document in English language.
11. Bidder to submit signed and stamped copy of OGDCL SOR as a token of acceptance.

Note: All terms and conditions are integral part of OGDCL tender Enquiry.


Handwritten signature and date: 08/11/18

Page 02 of 03

Order by Part Number and Description. Reference Numbers for your convenience only.

STEM GUIDED VALVE - STEEL FITTED
(General Service - 5000 PSI)

15-517 Page 9

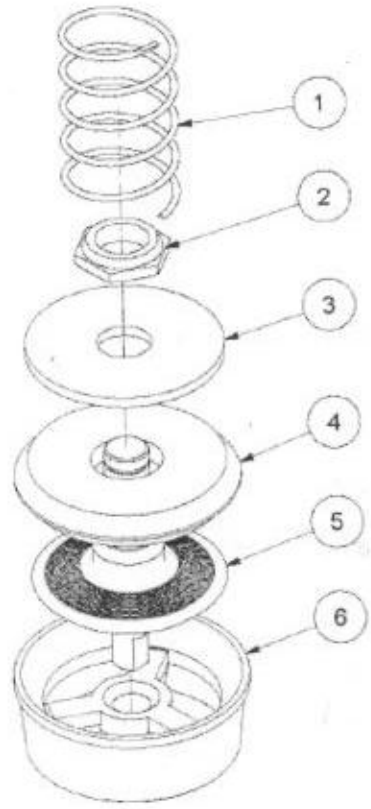

Ref Drawing - 327PZL810

Ref. No.	Name of Part	Qty.	Part No.
WITH POLYURETHANE INSERT			
	FLUID VALVE ASSEMBLY	6	202PZL482A
1	SPRING, Valve	6	78H44
2	LOCKNUT, Valve	6	50V27
3	WASHER, Valve	6	201PZL279
4	INSERT, Valve (Polyurethane).....	6	201PZL106
5	VALVE-FLUID.....	6	202PZL482
6	SEAT-VALVE.....	6	202PZL039

Ref. No.	Name of Part	Qty.	Part No.
WITH CARBOXYLATED NITRILE INSERT			
	FLUID VALVE ASSEMBLY	6	202PZL482B
1	SPRING, Valve	6	78H44
2	LOCKNUT, Valve	6	50V27
3	WASHER, Valve	6	201PZL279
4	INSERT, Valve (Carboxylated).....	6	202PZL106
5	VALVE-FLUID.....	6	202PZL482
6	SEAT-VALVE.....	6	202PZL039

Handwritten signature and date: 08/11/18