



# **WEB TENDER DOCUMENTS**

**TENDER ENQUIRY NO  
SP-2/WT/10022821/CABLE/2024/03**

**WEB TENDER FOR PROCUREMENT OF POWER CABLE (70 MM / 4 CORE)  
AT SEISMIC PARTY NO. 2.**

**(LOCAL PROCUREMENT)**

**OIL & GAS DEVELOPMENT COMPANY LIMITED**

**BID SUBMISSION DATE: 5<sup>TH</sup> SEPTEMBER 2024**

**OGDCL SALES TAX REGISTRATION**

**NO. 07-02-2802-001-55**

**INVITATION FOR BIDS**

**BIDDING DOCUMENT**

**TENDER ENQUIRY NO:  
SP-2/WT/10022821/CABLE/2024/03**

**Schedule of Requirement (Web Tender # SP-2/WT/10022821/CABLE/2024/03)**

<b>WEB TENDER FOR PROCUREMENT OF POWER CABLE (70 MM / 4 CORE)</b>			
<b>Sr. #</b>	<b>ITEM DESCRIPTION AND SPECIFICATIONS</b>	<b>QUANTITY</b>	<b>REMARKS</b>
1	<p><b><u>70MM / 4 CORE SWA CABLE SPECIFICATIONS</u></b></p> <ul style="list-style-type: none"> <li>✓ <b>CORE IDENTIFICATION:</b> 4 CORE (RED, YELLOW, BLUE, BLACK)</li> <li>✓ <b>CURRENT RATING:</b> 240 AMP (APPROX)</li> <li>✓ <b>STANDARD VOLTAGE RATING:</b> 600/1000 V</li> <li>✓ <b>CONDUCTORS:</b> PLAIN ANNEALED STRANDED COPPER</li> <li>✓ <b>INSULATION:</b> XLPE (CROSS LINKED POLYETHYLENE)</li> <li>✓ <b>NUMBER &amp; NOMINAL DIAMETER OF WIRES (mm):</b> 19 / 2.14</li> <li>✓ <b>STANDARD IMPERIAL STRANDING / WIRE DIAMETER (inch):</b> 19 / 0.083</li> <li>✓ <b>APPROX OVERALL DIAMETER:</b> 36.8MM (APPROXIMATE SIZE)</li> <li>✓ <b>APPROX WEIGHT PER METER:</b> 4.23 KG (APPROX)</li> <li>✓ <b>ARMOUR / PROTECTION:</b> GALVANIZED STEEL WIRE ARMoured (SWA)</li> <li>✓ <b>INNER COVERING (BEDDING):</b> PVC</li> <li>✓ <b>OUTER SHEATH/JACKET:</b> PVC</li> <li>✓ <b>OUTER COLOUR:</b> BLACK</li> </ul>	<p><b>300 METER</b></p> <p>ROLL REQUIREMENT: 300 METER IN SINGLE PIECE</p>	Required for Base Camp

## **TERMS AND CONDITIONS:**

1. The supplier should have minimum of 03 Years of experience in Sales.
2. Delivery period for material is 03 weeks from the date of issuance of Purchase order.
3. Single stage, single envelop bidding will take place at Base Camp SP-2, Mekhtar, Loralai, on the date as mentioned in tender Notice.
4. The Pay Order / Demand Draft of PKR. 150,000/- (Rupees One Hundred Fifty Thousand Only) in favour of Oil and Gas Development Company Limited, as Security deposit /performance bond must be enclosed with the quotation. Deposit of successful bidder will be retained and returned /refunded after the completion of job. Rest of the bid bonds of unsuccessful bidders will be released.
5. Web tender limit is 03 million (PKR).
6. The quantity of cable in meters should be adjusted within the tender limits (if bids for 300 meters exceed 03 million).
7. Inspection will be carried out at OGDCL site and after successful inspection of material, it will be accepted.
8. Payment will be made through cross Cheque and be released when once successful inspection of material at site is completed. OGDCL has the right to reject whole or part of supplied item if inspection results found unsatisfactory.
9. OEM backed warranty/ guarantee is mandatory.
10. Commercial series (Professional) is mandatory.
11. Any damaged material found during inspection will have to be replaced by the supplier without any extra charges.
12. Supplier to provide all necessary documents like Annex-C (Tax), professional tax certificate etc. with invoice.
13. Cable will be delivered at Seismic Party No. 2, the delivery charges to be borne by the supplier / bidder.
14. Bidder should submit complete/clean acceptance of OGDCL TOR.
15. OGDCL reserves the right to annul the case without assigning any reason thereof.
16. Prices should be inclusive of all applicable taxes.
17. Bid will be opened at Base camp SP-2, Mekhtar, Loralai, Baluchistan.
18. Any information regarding Tender may be obtained from Admin Office via Phone, Email or Base Camp on below address.

### **Seismic Party No. 2 (SP-2), OGDCL,**

Location: Seismic Party No. 2 OGDCL, Loralai-D.G. Khan Road, Mekhtar District Loralai

TCS: Party Chief SP-2, C/O Manager TCS, Main Branch, D.G.Khan.


Phone No. 051-2623082, 051-9225011, 0341-7713717 Email: party.chiefsp2@ogdcl.com

## 70MM 4 CORE SWA CABLE SPECIFICATIONS

- ✓ **CORE IDENTIFICATION:** 4 CORE (RED, YELLOW, BLUE, BLACK)
- ✓ **CURRENT RATING:** 240 AMP (APPROX)
- ✓ **STANDARD VOLTAGE RATING:** 600/1000 V
- ✓ **CONDUCTORS:** PLAIN ANNEALED STRANDED COPPER
- ✓ **INSULATION:** XLPE (CROSS LINKED POLYETHYLENE)
- ✓ **NUMBER & NOMINAL DIAMETER OF WIRES (mm):** 19 / 2.14
- ✓ **STANDARD IMPERIAL STRANDING / WIRE DIAMETER (inch):** 19 / 0.083
- ✓ **APPROX OVERALL DIAMETER:** 36.8MM (APPROXIMATE SIZE)
- ✓ **APPROX WEIGHT PER METER:** 4.23 KG (APPROX)
- ✓ **ARMOUR / PROTECTION:** GALVANIZED STEEL WIRE ARMoured (SWA)
- ✓ **INNER COVERING (BEDDING):** PVC
- ✓ **OUTER SHEATH/JACKET:** PVC
- ✓ **OUTER COLOUR:** BLACK

### ■ CONSTRUCTION :

#### 70mm 4 Core Steel Wire Armoured SWA Cable Construction

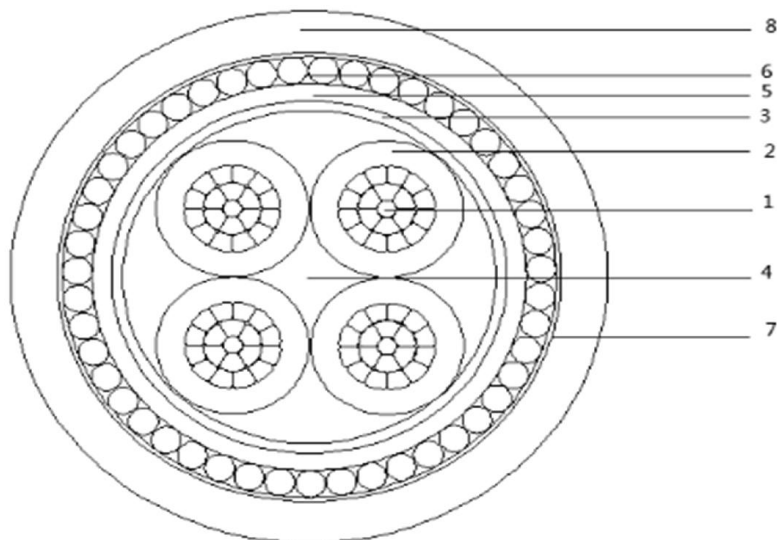

- 1: Conductor : Stranded compacted circular copper or aluminium
- 2: Insulation : XLPE
- 3: Binder tape: non-hygroscopic
- 4: Filler :non-hygroscopic
- 5: Inner covering (bedding): Extruded PVC
- 6: Metallic armour :Galvanized steel wire
- 7: Binder tape: non-hygroscopic
- 8: Sheath : PVC