

OIL & GAS DEVELOPMENT COMPANY LTD



Oil & Gas Development Company Limited
Regional Office Sukkur

Construction of Boundary wall at Govt. Primary School, Village Muhammad Yousaf Chachar UC Qadirpur Tehsil & Distt. Ghotki.

(TERMS OF REFENCES)

INVITATION FOR BIDS

Construction of Boundary wall at Govt. Primary School, Village Muhammad Yousaf Chachar UC Qadirpur Tehsil & Distt. Ghotki.

1.the Oil & Gas Development Company Limited (OGDCL) Regional Office Sukkur intends to hire services of a contractor for Construction of Boundary wall at Govt. Primary School, Village Muhammad Yousaf Chachar UC Qadirpur Tehsil & Distt. Ghotki.

1. The Company invites sealed bids from eligible Firms or Persons. Bidders may receive TOR from <http://www.ogdcl.com/> R.O Sukkur and obtain further information from OGDCL RO SUKKUR.
2. All bids must be accompanied by bid security @ 2% of quoted cost in shape of CDR or Pay Order or Demand Draft in the name of OGDCL. Regional Office Sukkur and shall be addressed to Regional Coordinator Sukkur. The bid security of the lowest bidder shall be released after signing of contract agreement. Bids will be opened at time & date as mentioned in the press advertisement, in the presence of bidders representatives who choose to attend.
3. The Contractor Company should have valid NTN and sale tax registration.
4. Signed & Stamped contract document (downloaded from www.ogdcl.com) should be submitted along with seal bid.
5. The rate quoted by the contractor shall be per RFT inclusive of all Taxes, levies, and other expenditures. It shall remain Firm during the contract period.
6. Payment shall be made to contractor through cross Cheque only. No cash payment is allowed.
7. The contract may be terminated on a notice of one week, after award and during contract period, if the services are not being provided as per terms and condition.
8. OGDCL reserves the right to accept any or reject any or all bids.
9. Lowest Bidder will deposit 10% of performance Guaranty before the issuance of work order.

**TECHNICAL EVALUATION CRITERIA FOR
Oil & Gas Development Company Limited
Regional Office Sukkur**

Construction of Boundary wall at Govt. Primary School, Village Muhammad Yousaf Chachar UC Qadirpur Tehsil & Distt. Ghotki.

Responsive % = 70%

1	2	3	4	5	6	7	8	9	10	11	12	13
Sr #	Name of Firm & address	Valid Firm Registration with Govt. (10)	Proof of enlistment with other Deptt. In same category (10) Enlistment letters of current year required	Audited Accounts/ Bank statement (10)	General Experience (10) (work orders and performance certificate required)	Relevant Experience (25) (work orders and performance certificate required)	List of vehicles with make, model (20) Lease Agreement and purchase agreement required	List of relevant qualified staff with valid CNIC, Driving License and Trade Experience (10)	HS E Policy (05)	Arbitration or Litigation (-05)	Total	Remarks

TENDER NOTICE FOR THE CONSTRUCTION OF BOUNDARY WALL AT GOVT. PRIMARY SCHOOL, VILLAGE MUHAMMAD YOUSAF CHACHAR UC QADIRPUR TEHSIL & DISTT. GHOTKI.

BILL OF QUANTITY

Sr.#	Description	Quantity	Unit	Rate per Rft (Rs)	Total Amount (Rs).
------	-------------	----------	------	-------------------	--------------------

1	<p>Construction of boundary wall(as per X-Section attached) or instruction of Engineer in charge including</p> <ol style="list-style-type: none"> 1. Excavation in foundation upto 2.5'. 2. PCC 1:4:8 in foundation (6" thick). 3. Brick masonry in 1:4 cement mortar in foundation & super structure. 4. DPC (50mm thick P.C.C 1:2:4, using 3mm aggregate & finished smooth with steel float, covered with two coats, each of hot bitumen 0.75 kg per Sqm and blinded with 0.012 cum of sand per Sqm. 5. Back Filling 6. RCC 1:2:4 in Columbs including Shuttering, steel cutting/binding. 7. Cement Plaster on both sides(inner & outer face) of wall. 8. Fixing of angle post of 4.5' grouted 1'.00" in Column concrete ,fixing of 12 gauge barbed wire galvd, 2 strands 4 points barbs. 9. Paint work (Emulsion on steel work and weather shield on wall both side). 10. Clearance & cleaning of site after the completion of work. 11. Supply and fixing of steel gate. 	500.00	Rft		
				Total	

TENDER NOTICE FOR THE CONSTRUCTION OF BOUNDARY WALL AT GOVT. PRIMARY SCHOOL, VILLAGE MUHAMMAD YOUSAF CHACHAR UC QADIRPUR TEHSIL & DISTT. GHOTKI.

Oil & Gas Development Company Limited is the largest Exploration & Production listed company of Pakistan. The Detail about the company can be obtained from website <http://www.ogdcl.com>. Sealed Bid(s) / Quotation(s) are invited from well reputed Firms for the supply of drinking water given below under competitive bidding procedure, as per Public Procurement Regulatory Authority (PPRA) rules.

BILL OF QUANTITY

Sr.#	Description	Quantity	Unit	Rate per foot	Total Amount (Rs).
1	<p>Construction of boundary wall(as per X-Section attached) or instruction of Engineer in charge including</p> <ol style="list-style-type: none"> 1. Excavation in foundation upto 2..5'. 2. PCC 1:4:8 in foundation (6" thick). 3. Brick masonry in 1:4 cement mortar in foundation & super structure. 4. DPC (50mm thick P.C.C 1:2:4, using 3mm aggregate & finished smooth with steel float, covered with two coats, each of hot bitumen 0.75 kg per Sqm and blinded with 0.012 cum of sand per Sqm. 5. Back Filling 6. RCC 1:2:4 in Columns including Shuttering, steel cutting/binding. 7. Cement Plaster on both sides (inner & outer face) of wall. 8. Fixing of angle post of 4.5' grouted 1'.00" in Column concrete ,fixing of 12 gauge barbed wire galvd, 2 strands 4 points barbs. 9. Paint work (Emulsion on steel work and weather shield on wall both side). 10. Clearance & cleaning of site after the completion of work. 11. Supply and fixing of steel gate. Etc (Complete in all respect) 	500.00	Rft		
			Total (Rs)		


TERMS & CONDITIONS. The bidders are required to submit rate including all applicable taxes.

1. Interested suppliers/ Service Providers must have valid Tax Registration, complete business location with Phone, Fax & Postal address.
2. 2% of the total quoted price shall be submitted with bid as earnest money in the shape of DD/ PO or Bank Guarantee.
3. OGDCL reserves the right to accept or reject any Bid or to annul the Bidding process and reject all Bids as per PPRA rules.
4. Tender documents can be obtained from the office Regional Coordinator Sukher.
5. Sealed Bids/ Quotations completed in all respect are to reach the address given below by 10:30 Hrs on **02.08.2017** which will be opened on the same day at 11:00 Hrs.

REGIONAL CORDINATOR
(REGIONAL OFFICE SUKKUR)
OIL & GAS DEVELOPMENT COMPANY LTD.
Banglow A-25. Friends Society Shikar Pur road (SUUKUR)
Contact# 0719310750/ 03005553517, Fax 071930749

BOUNDARY WALL AT VILLAGE MUHAMMAD YUSUF CHACHAR

RCC COLUMN @ 10' C/C BOUNDARY WALL

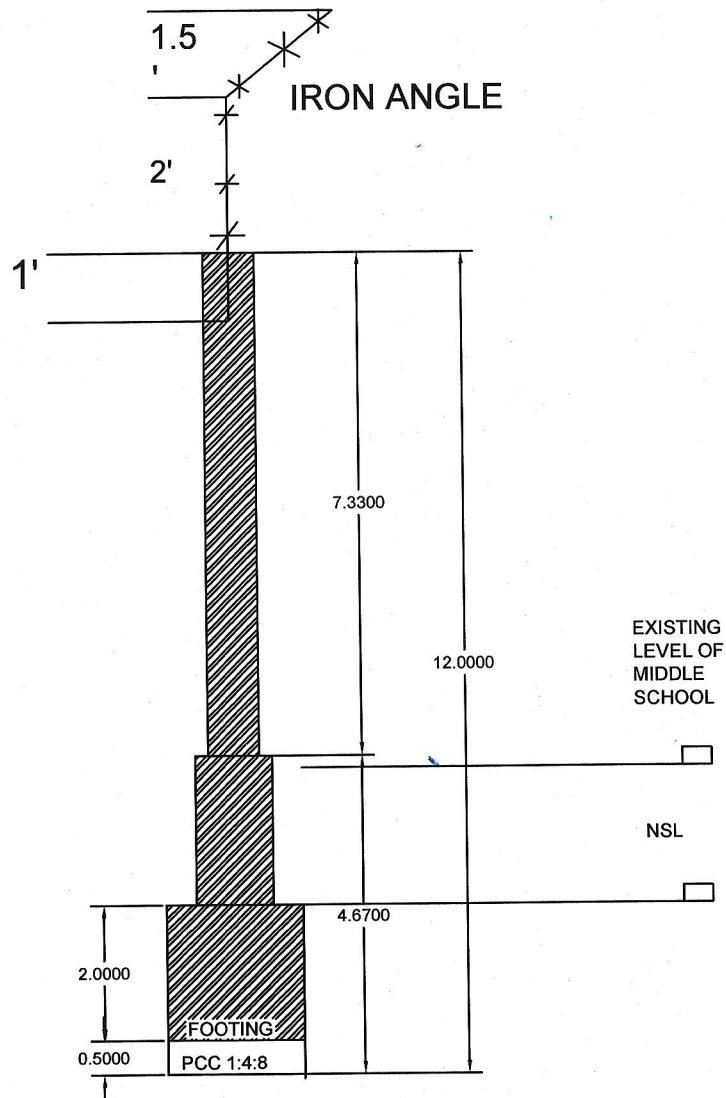

SECTION OF BOUNDARY WALL BRICK MASONARY

